




B8413-60-120-150 3CCT




1. Before installation, turn off the main power supply to ensure the luminaire is de-energized.








2. After selecting the mounting location, use a hammer drill to create two mounting holes in the wall surface. Insert expansion bolts into the holes. (Adjust the hole spacing based on the bracket length, ensuring it is less than the bracket length).

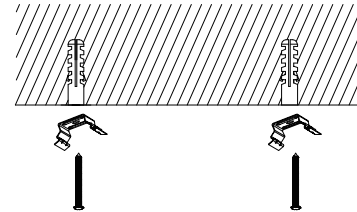

3. Secure the mounting clips to the ceiling or wall surface using screws. (For lengths of 1.5 meters or longer, secure three mounting clips as needed).

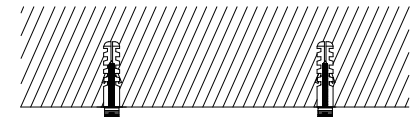

4. Unscrew the dial cover counterclockwise with a tool. Use a tool or finger to select the color temperature setting.
5. Tighten the dial cover clockwise with a tool.

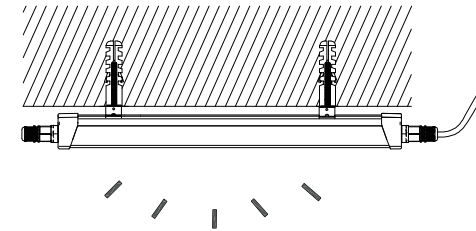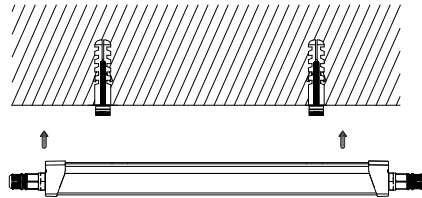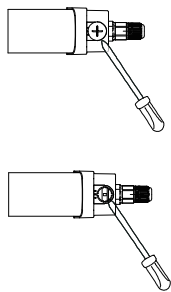

6. Unscrew the quick-connect waterproof connector counterclockwise. Feed the prepared cable through the waterproof cap. Press the quick-connect terminal to connect the L/N wires. Tighten the waterproof cap clockwise.
7. Press the light fixture into the mounting clips to complete installation. The fixture can be slid along the clips to the desired position as needed.

8. After installing the light fixture, turn on the power switch to begin use.