

Installation & Operating Instructions

PANTALLA ESTANCA CLIMATE X IP66 CON SELECTOR DE POTENCIA

EN- CLIMATE X IP66 WATERPROOF LUMINAIRE WITH POWER SELECTOR

FR- LUMINAIRE ÉTANCHE CLIMATE X IP66 AVEC SÉLECTEUR DE PUISSANCE

IT- CLIMATE X IP66 APPARECCHIO CON INTERRUOTORE PER REGOLARE LA POTENZA LUMINOSA

PT- CLIMATEX APARECCHIO IMPERMEÁVEL IP66 COM SELETOR DE ENERGIA



①




X4

X4


X2

ES- Montaje en superficie
EN- Surface Mounting
FR- Montage en saillie
IT- Montaggio in superficie
DE- Aufputzmontage
PT- Montagem de superficie
CAT- Muntatge en superfície

②




③





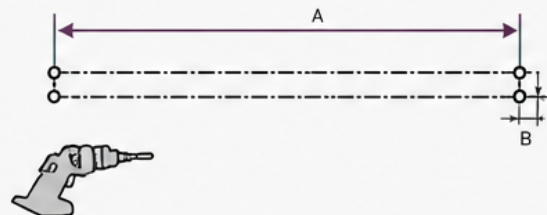


Dimensión	A(mm)	B(mm)
1180	1015	15

④

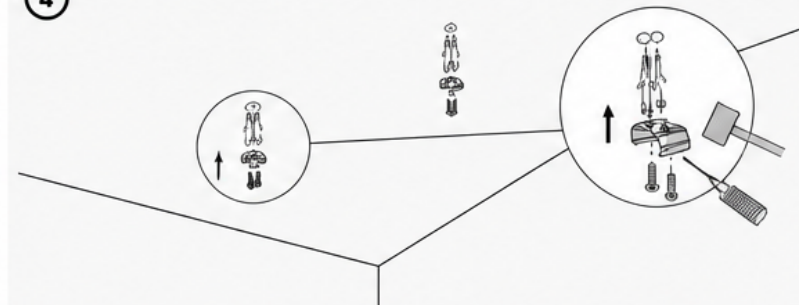

Installation & Operating Instructions

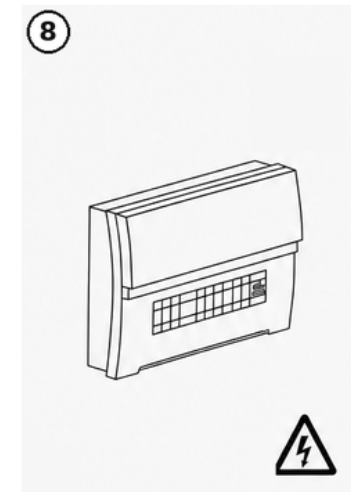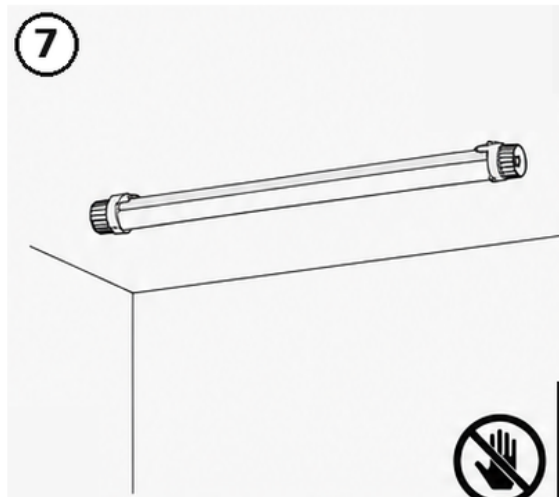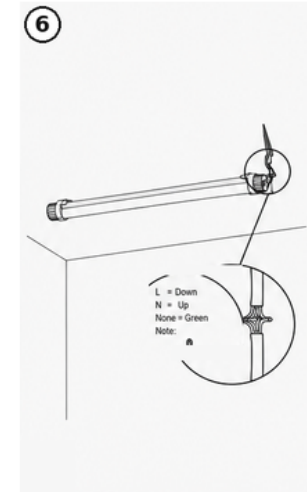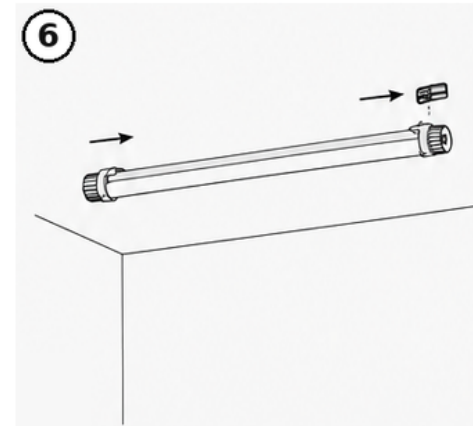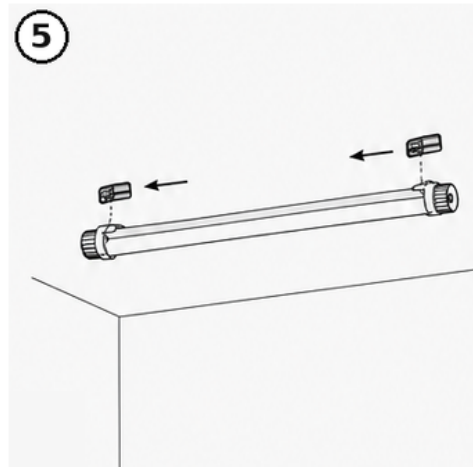

4000K
WHITE

IP66
RATED

50,000h
LIFETIME

5 YEAR
WARRANTY



UK
CA

CE

