




Wiring Diagram

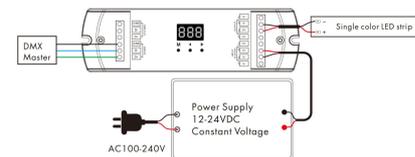


Note:
 1. An DMX signal amplifier is needed if more than 32 decoders are connected, or use overlong signal line, signal amplification should not be more than 5 times continuously.
 2. If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each DMX signal line

DMX512 Decoder 12-24V DC - 15A - 1 Channel

Ref. SK-D1-L

The DMX512 Decoder is an LED lighting control device with 1 output channel with a maximum current of 15A. It's compatible with 12-24V input voltages. It uses DMX512 input signal and provides PWM output signal to achieve smooth lighting control. It supports RDM remote control, allows to select output resolution and PMW frequency setting.

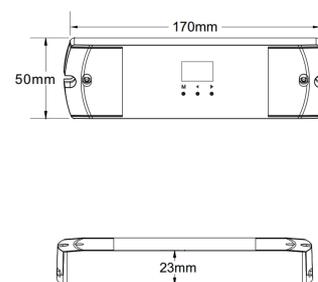

Datos del producto

Nominal Voltage (V)	12-24V
Dimensions (mm) LxHx	170 x 50 x 23
Use Outdoor	No
IP	IP20
Certificates	CE, ROHS
Warranty	According to legal guarantee: 2 years
Connectivity	DMX
Output voltage (V)	200 - 250V
Number of channels	1
Maximum intensity (A)	15

