






RoHS SELV CE Class 2

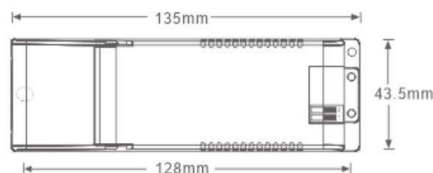

DALI 2-8V 6.4W multicurrent dimmable driver (650-800mA)

Ref. PE10DA09

Dimmable DALI multicurrent driver 6,4W. Dimming with DALI protocol. Constant current output, for LED luminaires of 2-8V and intensity between 650ma and 800ma. The driver incorporates EMC filter, does not produce flicker (NO FLICKER) and regulates smooth and constant lighting without jumps and without noise. Multicurrent settable by DIP Switch. 650ma, 700ma, 750ma and 800ma.

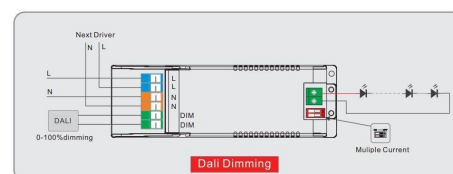

Datos del producto

Nominal Voltage (V)	200-240V-AC
Frequency (Hz)	50
Power factor (cosφ)	0.95
Sensor	No
Dimensions (mm) LxIxh	135x43.5x26.5
Use Outdoor	No
IP	IP20
Temperature range	-20 ~ +65°C
Frequency of use	Intensive
Lifetime (h)	25000
Certificates	CE, ROHS, TUV
Warranty	According to legal guarantee: 2 years
Maximum power (W)	6,4
Control system	DALI;PUSH
Output voltage (V)	2-8V-DC

