




Wiring Diagram

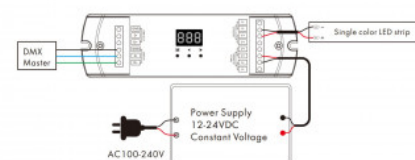


Note:
1. An DMX signal amplifier is needed if more than 32 decoders are connected, or use overlong signal line, signal amplification should not be more than 5 times continuously.
2. If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each DMX signal line

Decodificador DMX512 12-24V DC - 15A - 1 Canal

Ref. SK-D1-L

El Decodificador DMX512 es un dispositivo de control de iluminación LED con 1 canal de salida con una intensidad máxima de 15A. Es compatible con tensiones de entrada de 12-24V. Utiliza la señal de entrada DMX512 y proporciona una señal de salida PWM para lograr un control suave de la iluminación. Admite control remoto RDM, permite seleccionar la resolución de salida y ajuste de frecuencia PWM.



Datos del producto

Tensión Nominal (V)	12-24V DC
Dimensiones (mm) LxIxh	170 x 50 x 23
Uso Exterior	No
IP	IP20
Certificados	CE, ROHS
Garantía	Según garantía legal: 3 años
Conectividad	DMX
Tensión de salida (V)	12 - 24 V
Número de canales	1
Intensidad máxima (A)	15

