




Wiring Diagram

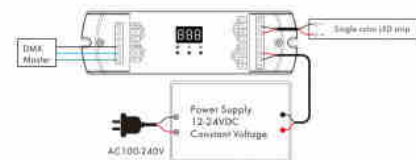


Note:
 1. An DMX signal amplifier is needed if more than 32 decoders are connected, or one overlong signal line, signal amplification should not be more than 5 times continuously.
 2. If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each DMX signal line.

DMX512 decoder 12-24V DC - 15A - 1 kanaal

Ref. SK-D1-L

De DMX512 Decoder is een regelapparaat voor LED-verlichting met 1 uitgangskanaal met een maximale stroom van 15A. Het is compatibel met ingangsspanningen van 12-24V. Hij gebruikt het DMX512 ingangssignaal en levert een PWM uitgangssignaal voor een soepele verlichtingsregeling. Ondersteunt RDM afstandsbediening, uitgangsresolutieselectie en PMW frequentieaanpassing.



Product data

Nominale spanning (V)	12-24 V DC
Afmetingen (mm) LxIxh	170 x 50 x 23
Gebruik buiten	Geen
IP	IP20
Certificaten	EC, ROHS
Garantie	5 jaar
Connectiviteit	DMX
Uitgangsspanning (V)	12 - 24 V
Aantal kanalen	1
Maximale stroom (A)	15

