




Wiring Diagram


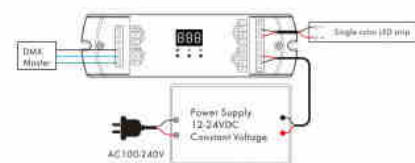


Note:
 1. An DMX signal amplifier is needed if more than 32 decoders are connected, or one overlong signal line, signal amplification should not be more than 5 times continuously.
 2. If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each DMX signal line.

Dekoder DMX512 12-24V DC - 15A - 1 kanał

Ref. SK-D1-L

Dekoder DMX512 to urządzenie sterujące oświetleniem LED z 1 kanałem wyjściowym o maksymalnym prądzie 15A. Jest kompatybilny z napięciami wejściowymi 12-24V. Wykorzystuje sygnał wejściowy DMX512 i zapewnia sygnał wyjściowy PWM do płynnego sterowania oświetleniem. Obsługuje zdalne sterowanie RDM, wybór rozdzielczości wyjściowej i regulację częstotliwości PWM.



Product data

Napięcie nominalne (V)	12-24 V DC
Wymiary (mm) LxIxh	170 x 50 x 23
Użytkowanie na zewnątrz	Nie
IP	IP20
Certyfikaty	WE, ROHS
Gwarancja	5 lat
Łączność	DMX
Napięcie wyjściowe (V)	12 - 24 V
Liczba kanałów	1
Maksymalny prąd (A)	15

