




## Wiring Diagram

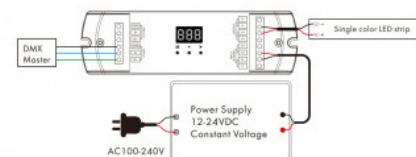


Note:  
1. An DMX signal amplifier is needed if more than 32 decoders are connected, or use overlong signal line, signal amplification should not be more than 5 times continuously.  
2. If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each DMX signal line

## Decodificador DMX512 12-24V DC - 15A - 1 canal

### Ref. SK-D1-L

O decodificador DMX512 é um dispositivo de controlo de iluminação LED com 1 canal de saída com uma intensidade máxima de 15A. É compatível com tensões de entrada de 12-24V. Utiliza o sinal de entrada DMX512 e fornece um sinal de saída PWM para um controlo suave da iluminação. Suporta um controlo remoto RDM, permite seleccionar a resolução de saída e ajuste da frequência PWM.



### Datos del producto

|                        |                          |
|------------------------|--------------------------|
| Tensão Nominal (V)     | 12-24V                   |
| Dimensões (mm) LxIxh   | 170 x 50 x 23            |
| Uso Exterior           | Não                      |
| IP                     | IP20                     |
| Certificados           | CE, ROHS                 |
| Garantia               | Garantia legal de 3 anos |
| Conectividade          | DMX                      |
| Tensão de saída (V)    | 200 - 250V               |
| Número de canais       | 1                        |
| Intensidade máxima (A) | 15                       |

