




Characteristics

SMD 3030, IP44
Beam angle for 45°15°
Aluminum PCB
UL/FCC/CE/RoHS approved
Constant current .5 years warranty
Suitable for double-sided light boxes

Rigid RGB LED Strip 56cm 10W 24V-DC for double-sided signage IP65


Ref. B1428RGB

Rigid LED bar with RGB lighting system for backlighting of light boxes or light boxes and double-sided signs. Its asymmetrical optics of 15° x 45°, together with the lateral installation inside the light box, offer an intense, homogeneous and shadowless illumination. Also, being a product with IP65 degree of protection, it can be used as an economical option when creating wall washers both indoors and outdoors. It operates at 24V-DC, with a power of 3.5W per color channel (total 10W). 10WRGB56cm24V-DC15x45° OpticsIP65

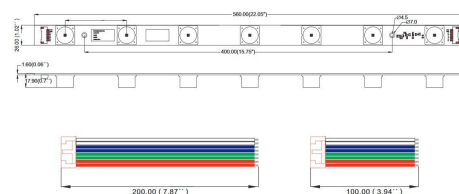

Datos del producto

Hue	RGB
CRI	80-85
Opening angle (°)	45x15 Asymmetric
UGR	No
LED Type	SMD 3030
Dimmable	Yes
Power (W)	10 (3x3.5W)
Nominal Voltage (V)	24V-DC
Dimensions (mm) LxIxh	560x26x18
Material	Aluminum
Diffuser material	Plastic
Use Outdoor	Yes
IP	IP65
Temperature range	-20°C ~ +45°C
Frequency of use	Intensive
Lifetime (h)	25000
Energy efficiency class	A+ (2021)
Certificates	CE, ROHS

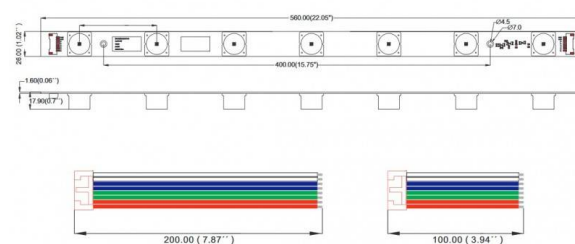

Warranty	According to legal guarantee: 2 years
Adhesive	No