


Downlight LED rectangular tilting downlight 38W 120° CCT LIFUD driver

Ref. B1263-CCT

Downlight LED Orientable rectangular 38W, equipped with SMD2835 LED chip and CCT System, which allows you to adjust the color temperature with a single click. Direct connection to 230V-AC, white housing. Angle of light emission at 120°. It offers the possibility of orienting it (tilting it) up to 60°. Ideal to illuminate in shop windows, counters, showcases... With a depth of 96mm, a width of 240mm and a height of 145mm. Cutting diameter: $\approx 225 \times 125 \text{mm}$. ✓ 38W ✓ 2700K-6000K ✓ 230V ✓ CRI >80 ✓ 120° ✓ Drive: SMD2835 ✓ IP20 ✓ Cutting diameter: $\approx 225 \times 125 \text{mm}$

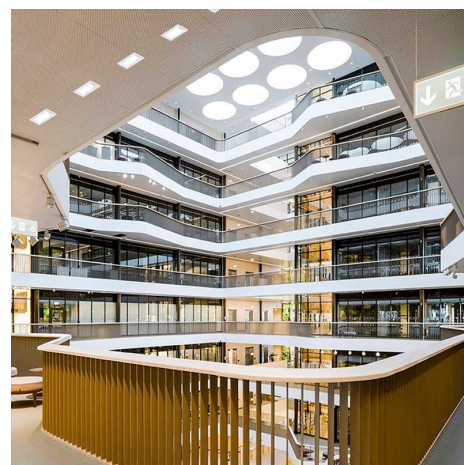

Datos del producto

Hue	Cool white, Neutral white, Warm white
Kelvin (K)	6000K, 4000K, 6000K
Opening angle (°)	120
UGR	No
Dimmable	No
Driver	Internal
Sensor	No
Orientable	Yes
Material	Aluminium
Use Outdoor	No
IP	IP20
Temperature range	-20°C ~ +40°C
Frequency of use	Intensive
Certificates	CE, ROHS
Warranty	According to legal guarantee: 2 years
Cutting dimensions (mm)	$\approx 225 \times 125$

