



Square recessed LED downlight plate with adjustable diameter 20W


Ref. B1275-7

RecessedLED downlight 20W adjustable for variable bores from 50mm to 205mm. The adjustable LED downlight is perfect for installation in both round and square holes, as the blades adapt to the size, pressing the LED downlight against the ceiling. For domestic use, with an average luminous flux of 1800 lumens.Power 20W230x230mm1800LMadjustableIP20




Product data

Hue	Cool white, Neutral white
Kelvin (K)	6000, 4000
Lumens (Lm)	1800
Efficiency (Lm/w)	90
CRI	80-85
Beam angle (°)	160
UGR	No
LED Type	SMD 2835
Dimmable	No
Nominal Voltage (V)	230
Frequency (Hz)	50-60
Power factor (cosφ)	0,9
Sensor	No
Orientable	No
Dimensions (mm) Lxlxh	230x230x11
Diffuser material	IP20
Use Outdoor	No
IP	IP20

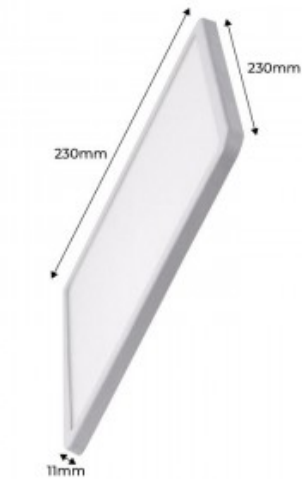

Temperature range	-20°C ~ +40°C
Frequency of use	Normal
Lifetime (h)	25000
Energy efficiency class	A+
Certificates	CE, ROHS
Warranty	3 years
Cutting dimensions (mm)	Ø50-205
Mounting	Recessed

Product variants

Reference	Attributes	
B1275-7-BN	Colour temperature - Neutral White	
B1275-7-BF	Colour temperature - Cool White	