


### Professional LED downlight professional 25W circular recessed Ø190 mm

#### Ref. B1264

Professional LED downlight circular recessed aluminum recessed for intensive use of high performance and polycarbonate diffuser. One of the advantages of LED downlights is their versatility. There are different models of different shapes, circular, square, rectangular, among others. In addition, they have different sizes to be able to adapt to the size of the installation. 25W 230V 2500LM Efficiency 100LM/W Cut: Ø187mm Outer diameter 230mm



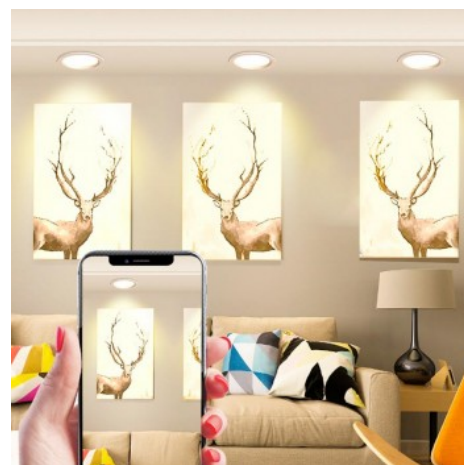

#### Product data

Hue	Cool white, Neutral white, Warm white
Kelvin (K)	3000, 6000, 4000
Efficiency (Lm/w)	114
CRI	80-85
Beam angle (°)	100
UGR	No
LED Type	SMD 2835
Dimmable	No
Power (W)	25
Nominal Voltage (V)	230
Frequency (Hz)	50-60
Power factor (cosφ)	0,98
Sensor	No
Orientable	No
Dimensions (mm) LxIxh	Ø230x35
Material	Aluminum
Diffuser material	IP20
Use Outdoor	No



IP	IP20
Temperature range	-20°C ~ +40°C
Frequency of use	Intensive
Lifetime (h)	25000
Energy efficiency class	A+
Certificates	CE, ROHS
Warranty	3 years
Cutting dimensions (mm)	Ø187
Mounting	Recessed

## Product variants

Reference	Attributes	
B1264BN	Colour temperature - Neutral White	
B1264BF	Colour temperature - Cool White	
B1264BC	Colour temperature - Warm White	