




**Slim surface LED panel 120X60cm - PHILIPS Driver - 72W - UGR19 - With mounting KIT**

### Ref. B4291

The PHILIPS surface mounted LED panel with driver features a sleek, ultra-slim design and state-of-the-art technology that allows it to provide powerful, uniform illumination in 3 shades: warm white (2800K), neutral white (4000K) and cool white (6000K). It is a high efficiency luminaire with a power of 72W and a luminous flux of 5900 lumens. It incorporates a micro-prismatic diffuser that ensures glare-free illumination (UGR<19), ideal for offices, conference rooms, schools or hospitals. Thanks to its high color rendering index (CRI>80) it reproduces colors very similar to natural light. Includes surface mounting kit with all accessories for easy and fast installation.

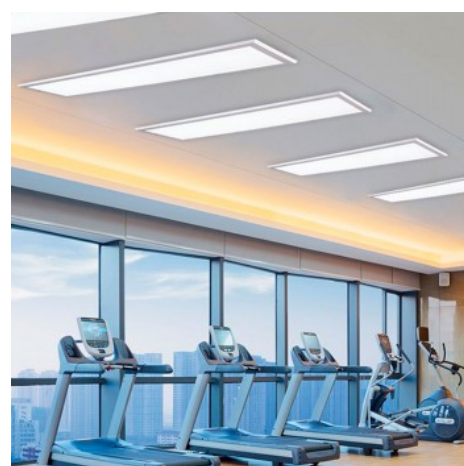



### Product data

Hue	Cool white, Neutral white, Warm white
Kelvin (K)	3000, 6000, 4000
Lumens (Lm)	5900
CRI	80-85
Beam angle (°)	160
UGR	UGR19
LED Type	SMD 4014
Power (W)	72
Nominal Voltage (V)	220 - 240 V/AC
Frequency (Hz)	50 - 60
Driver	Philips
Sensor	No
Orientable	No
Dimensions (mm) Lxlxh	
Diffuser material	Polycarbonate
Use Outdoor	No
Frequency of use	Intensive
Lifetime (h)	25000



Energy efficiency class	A+ (2021)
Certificates	CE, ROHS
Warranty	According to legal guarantee: 2 years
Mounting	Surface
LED Panel dimensions	120x60

## Product variants

Reference	Attributes	
B4291-BC	Colour temperature - Warm white 3000K	
B4291-BN	Colour temperature - Neutral white 4000K	
B4291-BF	Colour temperature - Cool white 6000K	