



100lm/W
Alta eficiencia
High efficiency
Haute efficacité

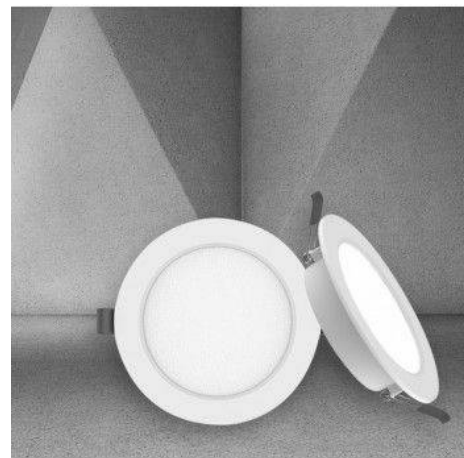

20W

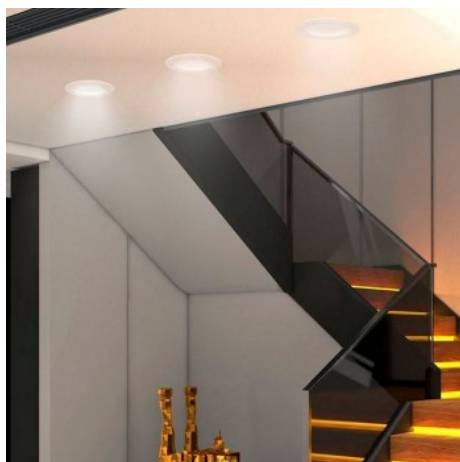

Recessed circular LED downlight 20W Cut Ø190mm

Ref. B1242

LED recessed downlights with a power of 20W. Circular in shape with an outer diameter of Ø217mm, with a depth of 25.7mm and a cutting diameter of Ø190mm. Manufactured with a white finish housing and an opal polycarbonate diffuser. This type of downlights is ideal for domestic and professional use. No flicker and no electromagnetic noise. Excellent combination of efficiency and quality design. 20W230V120°IP20




Driver de fuente
de luz integrado

Ángulo de 120°
Luz brillante y amplia






Product data

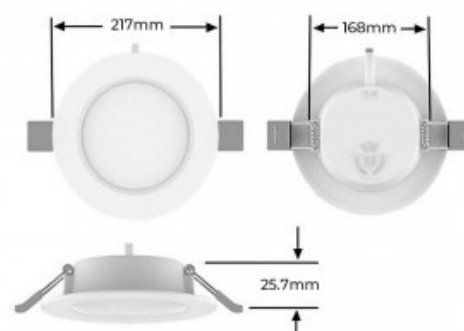Hue	Cool white, Neutral white, Warm white
Kelvin (K)	3000, 6000, 4000
Lumens (Lm)	2000
Efficiency (Lm/w)	100
CRI	80-85
LED Type	SMD 2835
Dimmable	No
Nominal Voltage (V)	230
Orientable	No
Dimensions (mm) LxLxh	Ø217x 25.7mm
Material	Polycarbonate
Diffuser material	Polycarbonate
Use Outdoor	No
IP	IP20
Temperature range	-20°C ~ +40°C
Frequency of use	Normal
Lifetime (h)	25000
Energy efficiency class	A+ (2021)



Certificates	CE, ROHS
Warranty	According to legal guarantee: 2 years
Cutting dimensions (mm)	Ø185-190mm
Mounting	Recessed

Product variants

Reference	Attributes	
B1242-B-20W-BF	Colour temperature - Cool White	<div><div>100lm/W A++ efficiency High efficiency RoHS & REACH</div><div>LED</div><div>20W</div></div>
B1242-B-20W-BN	Colour temperature - Neutral White	<div><div>100lm/W A++ efficiency High efficiency RoHS & REACH</div><div>LED</div><div>20W</div></div>
B1242-B-20W-BC	Colour temperature - Warm White	<div><div>100lm/W A++ efficiency High efficiency RoHS & REACH</div><div>LED</div><div>20W</div></div>