



Outdoor LED Floodlight 20W 1700LM IP65 | ENDURA LEDVANCE


Ref. 0206687-1

Outdoor LED floodlight of 20W and compact dimensions, 153x133x34mm. High luminous efficiency of 85lm/W, with a total of 1700 lumens. Beam opening angle of 120 degrees. Optimal color rendering, CRI>80. Neutral shade of 4000°K. Modern design with aluminum housing, high quality dark gray finish. Tempered glass diffuser, providing a homogeneous and intense illumination. Suitable for outdoor use, IP65 degree of protection. Tilting and swiveling, at an angle of 180 degrees. Integrated driver. Symmetrical beam angle of 110°x110°. Ideal for installation on facades, garages and any outdoor location.



Product data

Hue	Neutral white
Kelvin (K)	4000
Lumens (Lm)	1700
Efficiency (Lm/w)	85
CRI	80-85
Beam angle (°)	120
UGR	No
Dimmable	No
Power (W)	10
Nominal Voltage (V)	230
Frequency (Hz)	50 - 60
Driver	Internal
Sensor	No
Orientable	Yes
Dimensions (mm) LxIxh	153x133x34
Material	Aluminum
Diffuser material	Crystal
Use Outdoor	Yes

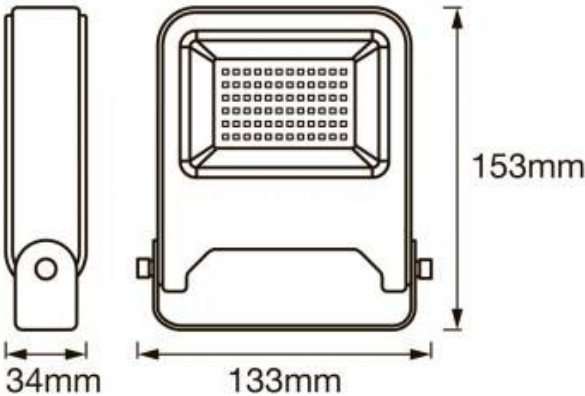

IP	IP65
Temperature range	-18°C ~ +55°C
Frequency of use	Normal
Lifetime (h)	25000
Energy efficiency class	A+ (2021)
Certificates	CE, ROHS
Warranty	According to legal guarantee: 2 years
Mounting	Surface

Product variants

Reference

Attributes

0206687

Colour temperature - Neutral White

