

Outdoor LED floodlight 30W 2700LM IP65 | ENDURA LEDVANCE


Ref. 0206700-1

30W LED floodlight with IP65 protection degree for outdoor use. High luminous efficiency of 90lm/W, with a total of 2700 lumen. Compact dimensions, 193x170x39mm. Neutral shade of 4000°K. Beam opening angle of 120 degrees. CRI>80, true to colors, optimal color rendering.Modern design with aluminum housing, high quality dark gray finish. Tempered glass diffuser, offering a homogeneous and intense illumination. Tilting and swiveling, at an angle of 180 degrees. Integrated driver. Symmetrical beam angle of 110°x110°.Ideal for installation on facades, garages and any outdoor location.



Product data

Hue	Neutral white
Kelvin (K)	4000
Lumens (Lm)	2700
Efficiency (Lm/w)	90
CRI	80-85
Beam angle (°)	120
UGR	No
Dimmable	No
Power (W)	30
Nominal Voltage (V)	230
Frequency (Hz)	50 - 60
Driver	Internal
Sensor	No
Orientable	Yes
Dimensions (mm) LxLxh	193x170x39
Material	Aluminum
Diffuser material	Crystal
Use Outdoor	Yes

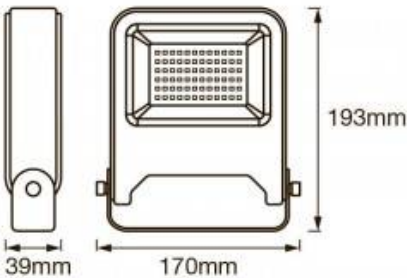

IP	IP65
Temperature range	-18°C ~ +55°C
Frequency of use	Normal
Lifetime (h)	25000
Energy efficiency class	A+ (2021)
Certificates	CE, ROHS
Warranty	According to legal guarantee: 2 years
Mounting	Surface

Product variants

Reference

Attributes

0206700

Colour temperature - Neutral White

