



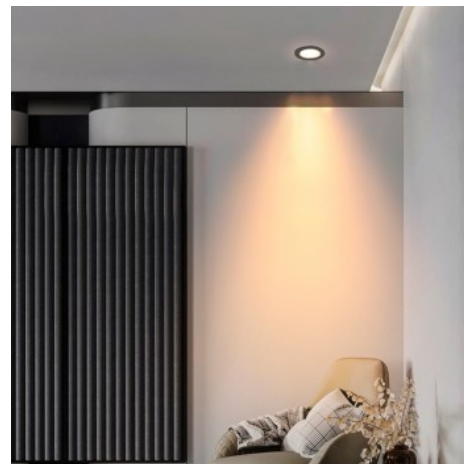


2W
IP20
≥90
LED

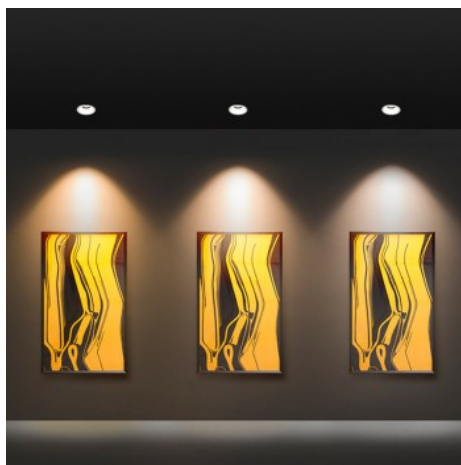

Downlight LED recessed Mini 2W Low UGR

Ref. B1250

Mini Downlight LED 2W for recessed ceiling. With very small dimensions, these LED downlights are perfect for ambient and focused LED lighting. With IP20 degree of protection, it is for indoor use only. Very discreet after installation, with a choice of black or white finish. Luminous angle of 27° and OSRAM SMD LED chip, CRI>90. LIFUD driver. Warm tone of 2700°K. Perfect for illuminating offices, shop windows, showcases, counters, in stores and stores, hotels, restaurants, and any room inside the home or business. The recessed downlight has dimensions of Ø30x24mm. The cutting diameter is Ø25mm.

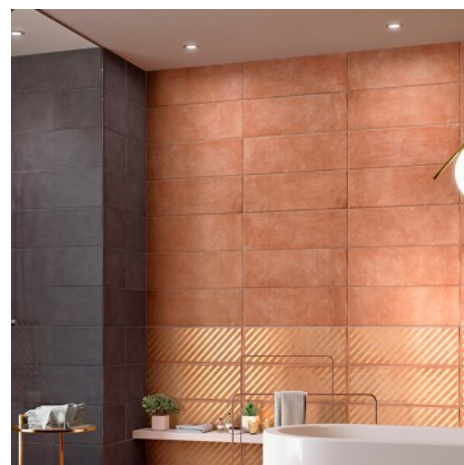



Product data

Hue	Warm white
Kelvin (K)	2700
CRI	90-95
Beam angle (°)	27
UGR	< UGR19
LED Type	SMD OSRAM
Power (W)	2
Nominal Voltage (V)	200-240V-AC
Frequency (Hz)	50 - 60
Driver	LIFUD
Sensor	No
Orientable	No
Dimensions (mm) LxLxh	Ø30x24
Material	Aluminium
Use Outdoor	No
IP	IP20
Certificates	CE, ROHS
Warranty	According to legal guarantee: 2 years



Cutting dimensions (mm)	25
Mounting	Recessed

Product variants

Reference	Attributes	
B1250-N-270	Colour temperature - Warm white 2700K,Colour - Black	 <p>2W IP20 ≥90 lm</p>
B1250-B-270	Colour temperature - Warm white 2700K,Colour - Whit	 <p>2W IP20 ≥90 lm</p>