


## Mini recessed downlight LED 5W Low UGR 55x43.1mm


### Ref. B1252

5Wmini LED downlight with minimalist style and decoration, perfect for home, office, hotels and commercial places. Ideal light to emphasize any detail. In addition to its sleek and modern design it also has the correct 30° beam for perfect accent lighting. Made of high quality aluminum. Exclusive for interior, it integrates perfectly into ceilings, with selectable black or white color finishes. Strong and durable downlight with high brightness and low power consumption of 5W. Integrated LiFud driver and OSRAM SMD LED chip. Optimal color rendering CRI>90. Pleasant to the eye, low UGR, and warm 2700°K. Reduced dimensions of Ø55x43,1mm. Cutting diameter of Ø50mm.



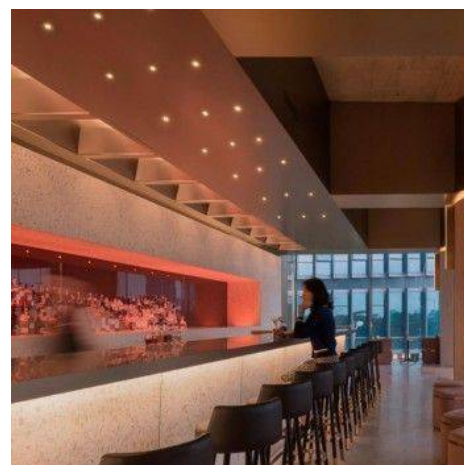

### Product data

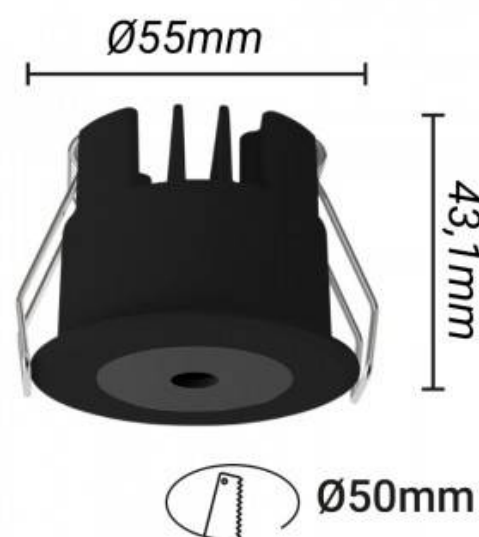Hue	Warm white
Kelvin (K)	2700
CRI	90-95
Beam angle (°)	30
UGR	< UGR19
LED Type	Chip OSRAM
Power (W)	5
Nominal Voltage (V)	200 - 250V AC
Frequency (Hz)	50 - 60
Driver	LIFUD
Sensor	No
Orientable	No
Dimensions (mm) LxIxh	Ø55x43,1
Material	Aluminium
Use Outdoor	No
IP	IP20
Certificates	CE, ROHS
Warranty	According to legal guarantee: 2 years



Cutting dimensions (mm)	Ø50
Mounting	Recessed

## Product variants

Reference	Attributes	
B1252-N-270	Colour temperature - Warm white 2700K, Colour - Black	 OSRAM LiFud 5W BAUCLONING UGR Ø55mm
B1252-B-270	Colour temperature - Warm white 2700K, Colour - Whit	 OSRAM LiFud 5W BAUCLONING UGR Ø55mm