



## Outdoor LED Floodlight 50W 4584LM IP65

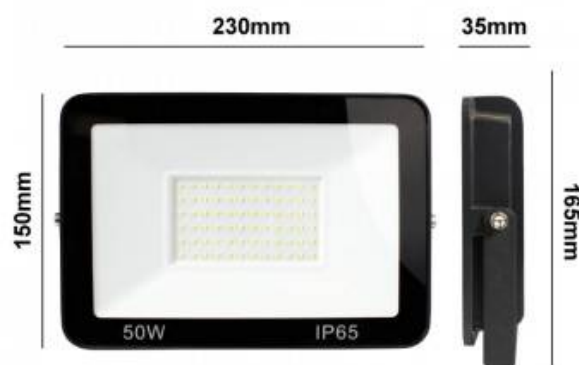
### Ref. B1883-2

Outdoor LED floodlight 50W, with IP65 degree of protection, waterproof. Compact dimensions and high brightness. High quality reflector, with more brightness, uniform illumination, wide opening angle of 120°. With compact dimensions of 230x165x35mm. Aluminum housing finished in black color. SMD 2835 LED chip. 230V. Optimum color rendering (CRI>80) and heat dissipation. Temperature to choose: warm, 3000°K and 4569lm, or cold, 6000°K and 4584lm. LED spotlights ideal for use as outdoor and indoor lighting, in gardens, warehouses, workshops, courtyards, shopping malls, garages, entrance of stores. Bracket adjustable in an angle of 180°, to orient the LED projector to the desired direction.





### Product data

Hue	Cool white, Warm white
Kelvin (K)	3000, 6000
Lumens (Lm)	4584, 4569
Efficiency (Lm/w)	86
CRI	80-85
Beam angle (°)	120
UGR	No
LED Type	SMD 2835
Dimmable	No
Power (W)	50
Nominal Voltage (V)	220 - 240 V/AC
Frequency (Hz)	50 - 60
Power factor (cosφ)	0.9
Driver	Internal
Sensor	No
Orientable	Yes
Dimensions (mm) LxHxW	230x165x35
Material	Aluminium



Diffuser material	Glass
Use Outdoor	Yes
IP	IP65
Temperature range	-20°C ~ +50°C
Frequency of use	Normal
Lifetime (h)	25000
Certificates	CE, ROHS
Warranty	According to legal guarantee: 2 years
Mounting	Surface

## Product variants

Reference	Attributes	
B1883-2-BF	Colour temperature - Cool White	 A black rectangular LED flood light with a silver mounting bracket. A circular icon in the top right corner indicates 50W power and a 60° beam angle.
B1883-2-BC	Colour temperature - Warm White	 A black rectangular LED flood light with a silver mounting bracket. A circular icon in the top right corner indicates 50W power and a 60° beam angle.