





24W  
LED  
100  
lm/W

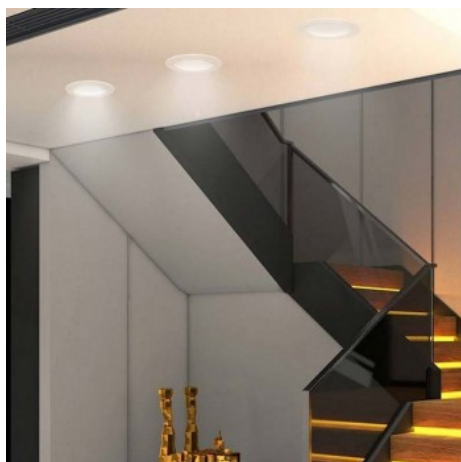

## Recessed circular LED downlight 24W cut-off Ø275mm

### Ref. B1243

Recessed LED downlight with a power of 24W. Circular shape with outer diameter of Ø295mm, with a depth of 30mm and a cutting diameter of Ø275mm. Manufactured with polycarbonate housing of circular structure with white lacquered trim frame. Opal polycarbonate diffuser emitting a homogeneous light. This type of downlight is ideal for domestic and professional use. No flicker and no electromagnetic noise. Excellent combination of efficiency and quality design. 24W 230V 120° IP20

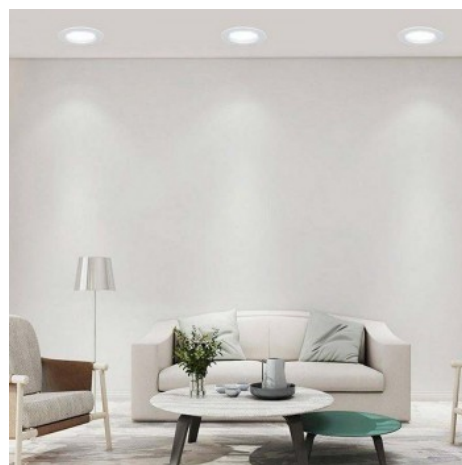





### Product data

Hue	Cool white, Neutral white, Warm white
Kelvin (K)	3000, 6000, 4000
Lumens (Lm)	2000
Efficiency (Lm/w)	80
CRI	80-85
LED Type	SMD 2835
Dimmable	No
Nominal Voltage (V)	230
Orientable	No
Dimensions (mm) LxLxh	295x295X30
Material	Polycarbonate
Diffuser material	Polycarbonate
Use Outdoor	No
IP	IP20
Temperature range	-20°C ~ +40°C
Frequency of use	Normal
Lifetime (h)	25000
Energy efficiency class	A+ (2021)



Certificates	CE, ROHS
Warranty	According to legal guarantee: 2 years
Cutting dimensions (mm)	Ø275-285
Mounting	Recessed

## Product variants

Reference	Attributes	
B1243-B-24W-BF	Colour temperature - Cool White	 
B1243-B-24W-BN	Colour temperature - Neutral White	 
B1243-B-24W-BC	Colour temperature - Warm White	