





## Pack of 4 slim LED panels 60X60 cm - Driver Philips - 44W - UGR19


## Ref. K5235-4

PACK x 4 recessed LED panels 60X60 cm - Philips Driver. Elegant and ultra slim panels with advanced technology for a powerful and uniform illumination in three shades of white (3000K, 4000K, 6000K). They have a power of 44W and a luminous flux of 3800 lumens. Ideal for offices, conference rooms, schools or hospitals. High color rendering index (CRI>80) for accurate color rendering and low glare index (UGR≤19). Can be mounted in false ceilings or recessed in plasterboard with recessing frame (not included).



## Product data

Hue	Cool white, Neutral white, Warm white
Kelvin (K)	3000, 6000, 4000
Lumens (Lm)	3900
CRI	80-85
Dimmable	Optional, replacing the driver
Power (W)	44W
Nominal Voltage (V)	230V
Frequency (Hz)	50 - 60
Sensor	No
Orientable	No
Dimensions (mm) Lxlxh	600x600x6mm
Diffuser material	Polycarbonate
Use Outdoor	No
IP	IP20
Temperature range	-0°C ~ +30°C
Frequency of use	Intensive
Lifetime (h)	25000
Energy efficiency class	A+ (2021)

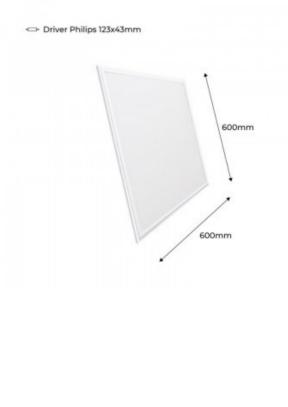



_Certificates Warranty	CE, ROHS_ 3 years
Mounting	Recessed
LED Panel dimensions	60x60

Product variants		
Reference	Attributes	PACK 44W © URC-19
K5235-BC-4	Colour temperature - Warm white 3000K	PACK 44W URC-19 URC-19 35
K5235-BN-4	Colour temperature - Neutral white 4000K	PACK LOT XX  PACK UTC 49  UTC 49  Service 19  Service
K5235-BF-4	Colour temperature - Cool white 6000K	PHILIPS COLID-VIII 11 June 1