

24W
CRI >80
LED
120°
100lm/W
CHIP
SMD 2835



Surface mounted LED ceiling lamp 24W High Efficiency


Ref. B1230-B-24W

Surface mounted LED ceiling light with 24W power. Minimalist design with measures of Ø289x38mm. Housing made of polycarbonate with white trim. Opal polycarbonate diffuser for a homogeneous and intense light. Thanks to the DOB, this LED ceiling light offers high efficiency with 100lm/W, low consumption, no flicker, no noise. Beam opening angle of 120 degrees. Ideal LED luminaire for both professional and private use. Perfect lighting that combines excellent efficiency with compact design for any interior.




Product data

Hue	Cool white, Neutral white
Kelvin (K)	6000, 4000
Efficiency (Lm/w)	100
CRI	80-85
LED Type	SMD 2835
Dimmable	No
Orientable	No
Material	Polycarbonate
Diffuser material	Polycarbonate
Use Outdoor	No
IP	IP20
Frequency of use	Normal
Lifetime (h)	25000
Energy efficiency class	A+ (2021)
Certificates	CE, ROHS
Mounting	Surface

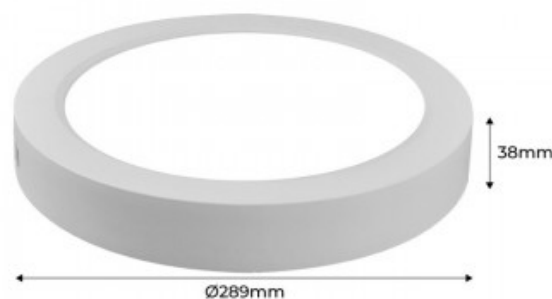

Product variants

Reference	Attributes	
B1230-B-24W-BN	Colour temperature - Neutral white 4000K	
B1230-B-24W-BF	Colour temperature - Cool white 6000K	