


RGB/RGBW pixel IC LED controller with RF remote control - 5-24V DC - 2048 pixels

Ref. SP104E

The LED driver IC features a very small design, adaptable to narrow spaces. It also includes a RF controller, a DC female connector and a 3-pin JST connector, easy to connect to power supply and digital LED strips. It has an input voltage from 5 to 24V DC and can control up to 2048 pixels. From the RF remote control it is possible to select any effect or scene from 200 preset patterns, adjusting brightness and speed.

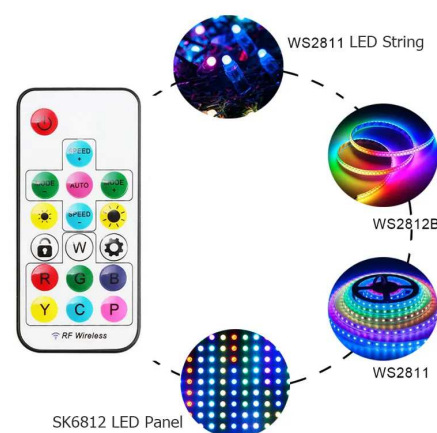

Datos del producto

Hue	RGB
Nominal Voltage (V)	5-24V
Dimensions (mm) LxHxW	Controller + connectors: 270mm
Material	Plastic
Use Outdoor	No
IP	IP20
Temperature range	-20°C ~ +60°C
Certificates	CE, ROHS
Warranty	According to legal guarantee: 2 years

