




Pack x 6 Recessed Backlight LED panel - 60x60cm - 4860lm - Philips driver - 36W - UG R22 - IP40


Ref. K5235-BACKLIGHT-6

PACK x 6 - Recessed Backlight LED panel 60x60cm - PHILIPS driverThe panel feature backlight or backlit technology, which combines innovative optical and mechanical design features to achieve high-efficiency, uniform lighting with minimal glare (UGR 22). Available in neutral white (4000K), warm white (3000K) and cool white (6000K), it has an output of 36W and a luminous flux of 4860 lumens. Its high color rendering index, CRI>80, allows it to reproduce colors very similar to natural light.

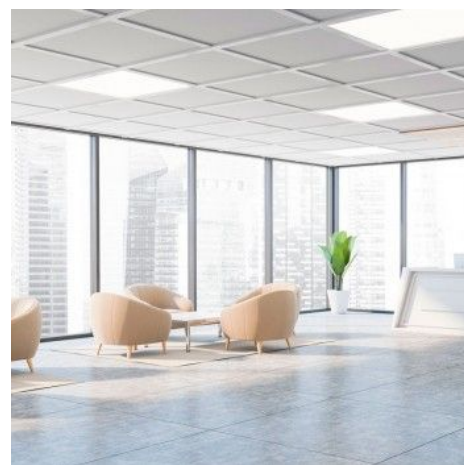

Product data

Hue	Neutral white
Kelvin (K)	4000
Lumens (Lm)	4860
Efficiency (Lm/w)	135
CRI	80-85
Beam angle (°)	120
LED Type	SMD 2835
Dimmable	No
Power (W)	36
Nominal Voltage (V)	185 - 265V AC
Frequency (Hz)	50 - 60
Power factor (cosφ)	0.9
Driver	Philips
Dimensions (mm) LxLxh	595 x 595 x 24
Use Outdoor	No
IP	IP40
Frequency of use	Intensive
Lifetime (h)	25000

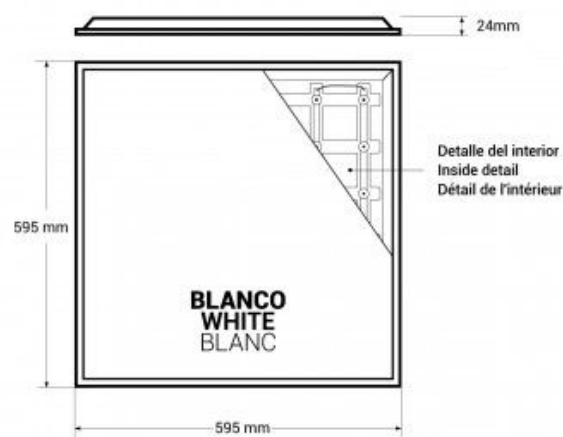

Energy efficiency class	D
Certificates	CE, ROHS
Warranty	According to legal guarantee: 2 years
Mounting	Recessed, Hanging
LED Panel dimensions	60x60

Product variants

Reference	Attributes	
K5235-BACKLIGHT-6-BN	Colour temperature - Neutral white 4000K	