




DALI + Push AC Phase Cut Dimmer

CE FC RoHS

2303SAC-HP

Important: Read All Instructions Prior to Installation

Function Introduction



1 CH 100-240VAC output AC 100-240V power input


Product Data

Input Voltage	Output Voltage	Output Current	DALI Consumption	Dim(L/W/V)
100-240VAC	100-240VAC	1.5A max	Dim max	45.5x45x20.3mm


Load/Dimmer	Load Type	Maximum Load	Remarks
	Dimmable LED strips	200W @ 220V 100W @ 110V	Due to variable LED strip dimming, maximum number of LED strips is limited. Please refer to DALI dimmer manual for details.
	Dimmable LED drivers	200W @ 220V 100W @ 110V	Maximum permitted number of drivers is 200W divided by driver's maximum power rating.
	Incandescent lighting, CFL, halogen lamps	200W @ 220V 100W @ 110V	
	Low voltage incandescent lighting with wire-bond transformers	200W @ 220V 100W @ 110V	

Wiring diagram

(1) With DALI Signal

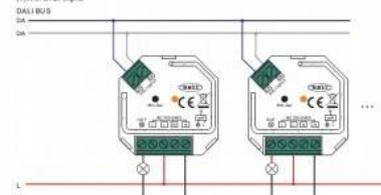

(2) With AC Push Switch

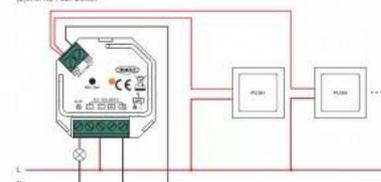

Controlador monocolor DALI y PUSH Dimmer - 400W - 1 canal - 100-240V AC - Sunricher

Ref. SR-2303SAC-HP

El controlador SR-2303SAC-HP es un regulador por corte de final de fase (trailing edge) con un canal controlable por DALI y PUSH (pulsador). Cuenta con entrada y salida a 100-240V/AC y 1 canal con una salida máxima de 400W. Es adecuado para lámparas LED regulables, halógenas o fuentes de alimentación regulables por corte en fin de fase. Cuenta con una innovadora función de brillo mínimo ajustable por el usuario y el mismo se puede regular hasta el 100%. Tamaño mini, fácil de instalar en una caja de pared estándar de 86x86mm. **Compatible con DALI-2**

Datos del producto

Tensión Nominal (V)	100 - 240 V AC
Dimensiones (mm) LxIxh	45.5x45x20.3
Certificados	CE, ROHS
Garantía	Según garantía legal: 3 años
Intensidad máxima (A)	1.5

