



KEY FUNCTION

T13 RGB panel



- Turn on/off all zone light.
- Color wheel.
- Short press play 10 built-in dynamic mode, long press 2s run mode/cycle.
- Adjust dynamic mode speed or RGB color saturation, 10 levels.
- Adjust brightness, 10 levels.
- Short press replay scene, long press 2s to save the current color into the scene.


1 2 3 4
Short press turn on zone light and select zone simultaneously, long press 2s turn off zone light.
Short press multiple zone key fastly, will select multiple zone synchronously.
4 zone control separately or synchronously, each zone could control multiple receivers.

DMX Touch-Steuerung - 4 Zonen - RGB

Ref. SK-T13

Die 4-Zonen DMX Touch-Steuerung für den Einbau bietet eine vollständige Beleuchtungssteuerung für 100-240V RGB-LED-Leuchten. Sie kann als DMX512-Master oder als RF-Fernbedienung betrieben werden. Die elegante, hochempfindliche Touch-Glasoberfläche verfügt über ein Farbrad für präzise Einstellungen sowie über Touch-Tasten mit LED-Anzeigen. Helligkeit, Sättigung, Geschwindigkeit in Szenen und dynamischen Modi, etc. können reguliert werden.

Mechanical Structures and Installations

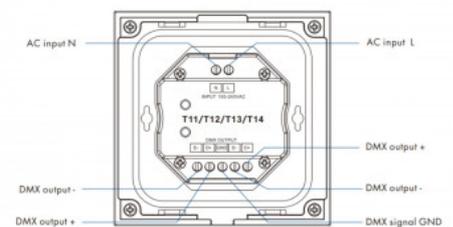

Produktdaten

Dimmbar	Ja
Nennspannung (V)	100-240V
Abmessungen (mm) LxBxH	86 x 86 x 33
Material	Glas
Außeneinsatz	Nein
Schutzart	IP20
Temperaturbereich	-30°C ~ +55°C
Prüfzeichen	CE, ROHS
Garantie	Laut gesetzlicher Gewährleistung: 2 Jahre
Montage	Einbau
Vernetzung	RF, DMX
Farbsteuerung	RGB
Gewicht (kg)	0,181kg

