

IR Sensor Switch


09.8001B.04289




Important: Read All Instructions Prior to Installation

Function introduction

DC Version

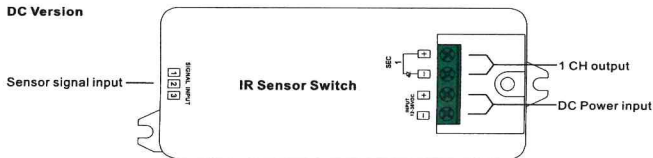

AC Version

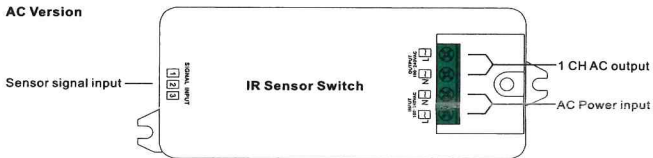

Product Data

No.	Input Voltage	Output Current	Output Power	Remarks	Size(LxWxH)
DC	12-36VDC	1x8A	1x(96-288)W	Constant voltage	95x37x20mm
AC	100-240VAC	5A	500W	Constant current	95x37x20mm


- Any reflection within the detection range would cause the change ON of switch and OFF when a new motion is detected (A version).
- Any reflection within the detection range would cause the status OFF of switch and no reflection to cause status ON of switch(B version).
- Detection range: 1-6cm.
- For cabinet,door open light ON, door close light OFF
- Ideal for kitchen, furniture, mirror, etc.
- DC or AC version
- Four sensor shells can be chosen. Dia. of drilling hole: ϕ 10mm & ϕ 17mm.
- Waterproof grade: IP20

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

Wiring Diagram

DC Version

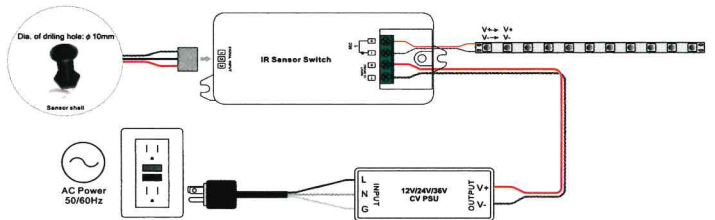

AC Version

