


Switch with IR proximity sensor 12-36V 1Ch 3A


Ref. SR-2005

Infrared sensor switch for 12-36V. Sensitive to proximity movement. Perfect for furniture, kitchen lights, mirror lights, etc. The switch is activated by passing the hand over the detection zone, and maintains the function until it detects motion again within the action zone. Memory function allows to keep the last setting mode when it is turned on again.- High sensitivity.- Detection range of maximum 6 centimeters.- Smooth dimming, no flickering.- Turns the light on / off with a simple movement.

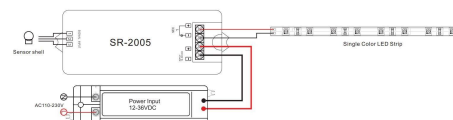

Datos del producto

Nominal Voltage (V)	12/36V-DC
Sensor	Yes
Detection range (m)	60
Dimensions (mm) LxLxh	33x82x20
Material	Plastic
Use Outdoor	Yes, in a watertight box
IP	IP20
Temperature range	-20 ~ +50°C
Frequency of use	Intensive
Lifetime (h)	35000
Energy efficiency class	A+ (2021)
Certificates	CE, ROHS
Warranty	According to legal guarantee: 2 years
Maximum power (W)	108
Connectivity	By wiring
Control system	12/24V-DC
Colour control	Monocolor
Output voltage (V)	0/36V-DC

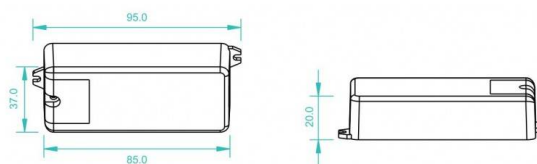

Dimmers and Lighting Controllers mono-color 12-24V

Number of channels	1
Number of zones	1
Maximum intensity (A)	3A