**Product Data**


No.	Input Voltage	Output Current	Output Power	Remarks	Size(LxWxH)
1	12-36VDC	1x8A	1x96-288W	Constant voltage	95x37x20mm
2	12-36VDC	1x350mA	1x4.2-12.6W	Constant current	95x37x20mm
3	12-36VDC	1x700mA	1x8.4-25.2W	Constant current	95x37x20mm

• Radio Frequency: 868/915/434mhz
• Waterproof grade: IP20

Single color regulator 12-36V 1 channel 8A SUNRICHER - Perfect RF

Ref. SR-1009CS

The dimmer with reference D1009CS is a constant voltage radio frequency LED dimmer. It is a 1 channel 12-36V dimmer with a maximum output of 8A. It controls the intensity of different types of LED lighting systems with the decoder compatible with various remote controls for switching and dimming single color LED lighting. Multiple zones can be controlled separately or synchronously with multiple receivers in each zone. Adjusts brightness without flickering. Dimming function is available when connected with a push switch. * Installation requires a qualified professional and/or advice from our technicians.

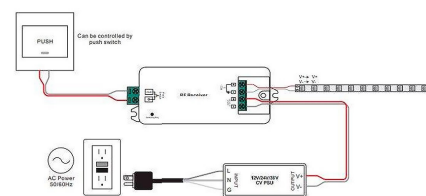

Datos del producto

Power (W)	96-288 máx.
Nominal Voltage (V)	12/36V-DC
Sensor	Yes
Dimensions (mm) LxIxh	95x37x20
Material	Plastic
Use Outdoor	Yes, in a watertight box
IP	IP20
Temperature range	-20 ~ +50°C
Frequency of use	Intensive
Lifetime (h)	35000
Energy efficiency class	A+ (2021)
Certificates	CE, ROHS
Warranty	According to legal guarantee: 2 years
Colour control	Monocolor
Output voltage (V)	12/36V-DC
Number of channels	1
Maximum intensity (A)	8A

